

MONO CRYSTALLINE HALF-CUT MODULE

385 / 390 / 395 / 400 / 405 Watts







Black Panther







Overview

Ground breaking technology: higher power output, improved system performance - the ideal solution for end users who want a fast turnaround on their investments. A fully certified premium quality and high efficiency module made with A Grade materials.

Key Benefits

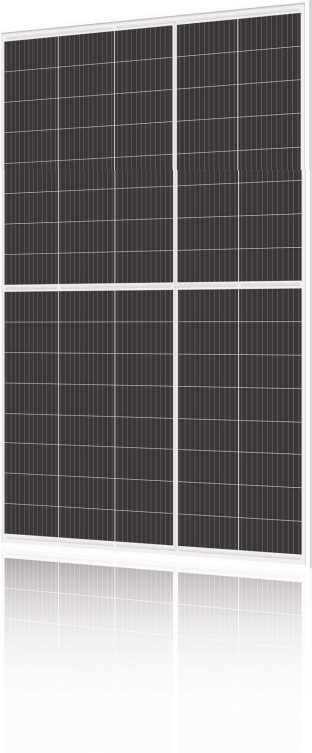 Certified by Independent Engineering Bodies	 Product Liability Insurance
 Ultra High Power Output	 15 Years Limited Product Warranty
 Low Resistive Losses	 Low LCOE




-  Guaranteed mechanical resistance to severe weather conditions
-  Positive Tolerance
-  100% electro-luminescence tested

Tests, Certifications and Warranties

Standard Tests	IEC 61215, IEC 61730
Factory Quality Tests	ISO 9001: 2015, ISO 14001: 2015
Certifications	Conformity to CE, PV CYCLE Fire safety Class C according to UL790
Insurance	Third party liability insurance provided by Liberty Mutual
Wind and Snow Loads Testing	Module certified to withstand extreme wind (2400 Pascal) and snow loads (5400 Pascal)
Power Tolerance	Guaranteed +0%/+5% (STC condition)
Warranties	<ul style="list-style-type: none"> • 15-year limited product warranty • 15-year manufacturer warranty on 90.44% of the nominal performance • 25-year transferable linear power output warranty

Linear Performance Warranty

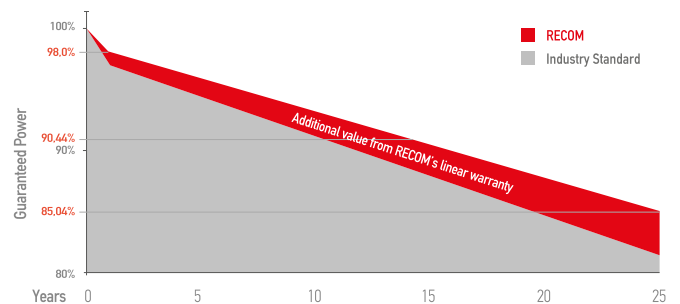

First Year Output **≥ 98%** 2-25 Year Decline **≤ 0.54%** 25 Year Output **≥ 85.04%**

MONO CRYSTALLINE HALF CUT MODULE

RCM-xxx-8MO (xxx=385-405)

Electrical Characteristics

POWER CLASS ⁽¹⁾			385		390		395		400		405	
Testing Condition			STC	NMOT	STC	NMOT	STC	NMOT	STC	NMOT	STC	NMOT
Maximum Power	P _{max}	[Wp]	385	291.45	390	295.24	395	299.02	400	302.81	405	306.6
Maximum Power Voltage	V _{mp}	[V]	23.79	22.14	24.00	22.34	24.21	22.53	24.42	22.73	24.63	22.92
Maximum Power Current	I _{mp}	[A]	16.19	13.16	16.26	13.22	16.32	13.27	16.39	13.33	16.45	13.37
Open Circuit Voltage	V _{oc}	[V]	28.67	27.02	28.92	27.26	29.18	27.50	29.43	27.74	29.68	27.98
Short Circuit Current	I _{sc}	[A]	17.19	13.85	17.26	13.91	17.33	13.96	17.40	14.02	17.47	14.07
Module Efficiency	Eff	[%]	19.96		20.22		20.48		20.74		21.00	
Maximum Series Fuse	I _R	[A]	30									
Maximum System Voltage	V _{sys}	[V]	1500 V DC (IEC)									

(1) Measurement Tolerances: P_{max} (± 3%), I_{sc} & V_{oc} (± 5%) - Power Classification 0/+5W


(2) STC (Standard Testing Condition): Irradiance 1000W/m², Cell Temperature 25°C, AM 1.5

(3) NMOT (Nominal Operating Module Temperature): Irradiance 800W/m², NMOT, Ambient Temperature 20°C, AM 1.5, Wind Speed 1m/s

Mechanical Data

Dimensions	1760mm x 1096mm x 35mm
Weight	21.5 Kg
Cell Type	Mono Perc – 210mm x 105mm (2 x 40) – G12
Front Glass	3.2mm Tempered and low iron glass + ARC
Rear Side	Anti-aging film
Frame	Anodized Aluminium Alloy
Junction Box	IP68 - 3 Bypass diodes
Connector	EVO2 compatible
Output cable	4mm ² - Length = 350mm or customized

Dimensions

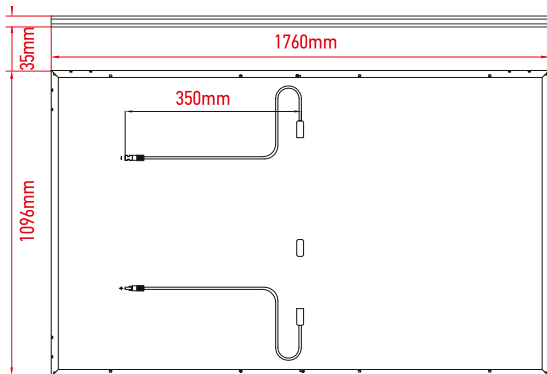


RECOM assumes no liability or responsibility for any typographical error, layout error, misinformation, any other error, omission, contained herein.

recom-solar.com

I-V Curve

The module relative power loss at low light irradiance of 200W/m² is less than 3%.

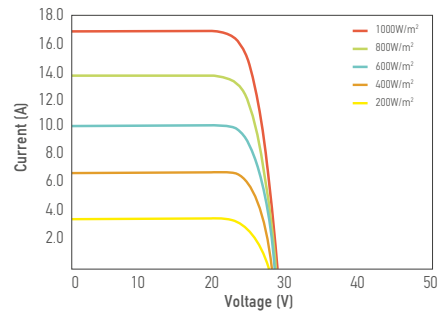

Temperature Characteristics

P _{max} Temperature Coefficient	-0.362% / °C
V _{oc} Temperature Coefficient	-0.262% / °C
I _{sc} Temperature Coefficient	+0.042% / °C
Operating Temperature	-40~+85 °C
Nominal Operating Module Temperature (NMOT)	43 ± 2°C

Packing Configuration

Container	40'HC
Pieces per Pallet	31
Pallets per Container	26
Pieces per Container	(31+31+2)x13=832 pcs

The specification and key features described in this datasheet may deviate slightly and are not guaranteed. Due to on-going innovation, research and product enhancement, RECOM Solar reserves the right to make any adjustment to the information described herein at any time without notice. Please always obtain the most recent version of the datasheet which shall be duly incorporated into the binding contract made by the parties governing all transactions related to the purchase and sale of the products described herein. Please read the safety and installation instructions before using the modules.

© Copyright 2021. RECOM

**Release RCM-xxx-8MO(XXX=385-405)-12-612-35-5W-15V-006-2021-06-v2.0